




# BEARING BOWER CORP.

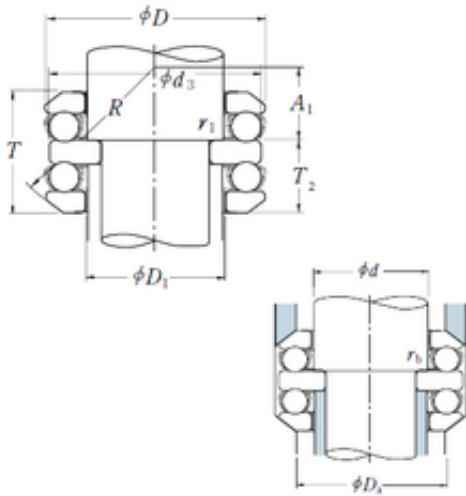

35 mm x 80 mm x 14 mm NSK 54407 thrust ball bearings

Bearing No. 54407

54407 Bearing 2D drawings and 3D CAD models

Size	35x80x63 mm
Bore Diameter	35 mm
Outer Diameter	80 mm
Width	63 mm
d	35 mm
d2	25 mm
D	80 mm
T	63 mm
T2	38,5 mm
d3	80 mm
r min.	1,1 mm
r1 min.	0,6 mm
A1	18,5 mm
B	14 mm
D1	37 mm
R	64 mm
Da max.	58 mm
ra max.	1 mm
rb max.	0,6 mm
Weight	1,47 Kg
Basic dynamic load rating (C)	87,5 kN
Basic static load rating (C0)	155 kN
(Grease) Lubrication Speed	1800 r/min
Category	Thrust Ball Bearing
Inventory	0.0



## BEARING BOWER CORP.

Manufacturer Name	NSK
Minimum Buy Quantity	N/A
Weight / Kilogram	1.79
Product Group	B00308
Rolling Element	Ball Bearing
Thrust Bearing	Yes
Single or Double Direction	Double Direction
Banded	No
Cage Material	Steel
Precision Class	Non-Precision
Component Description	Roller Assembly Plus Raceways
Other Features	Double Row   With Aligning Seat
Long Description	25MM Bore 1; 37MM Bore 2; 80MM Outside Diameter; 63MM Height; Ball Bearing; Double Direction; Not Banded; Steel Cage; Non-Precision
Inch - Metric	Metric
Category	Thrust Ball Bearings
UNSPSC	31171552
Harmonized Tariff Code	8482.10.50.08
Noun	Bearing
Keyword String	Ball Thrust
Manufacturer URL	<a href="http://www.nskamericas.com">http://www.nskamericas.com</a>
Weight / LBS	3.15261
Bore 2	1.457 Inch   37 Millimeter
Outside Diameter	3.15 Inch   80 Millimeter
Overall Height with Aligning Washer	0 Inch   0 Millimeter
Height	2.48 Inch   63 Millimeter
Bore 1	0.984 Inch   25 Millimeter



# BEARING BOWER CORP.